

21GX Triple Axle Extra Wide Gooseneck Dump


G.V.W.R.	21,000#	Axles	(3) 7,000# EZ Lube w/Elec. Brake
G.A.W.R. (Ea. Axle)	7,000#	Supension	Multi-Leaf Slipper Spring w/Equalizer
Coupler	2-5/16" Adjustable Pipe	Tire	ST235/80 R-16 Load Range E
Safety Chains	3/8" Grd. 70 w/Safety Latch Hook (2 each)	Wheel	16" x 6"; HD White Mod 8 Bolt
Jack	Dual 12,000# Side Wind Drop Legs	Floor	10 Gauge Smooth Steel
Neck	10" I-Beam	Lights	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
Frame	8" x 3" Rectangular Tubing	Elec. Plug	7-Way RV
Crossmembers	6" Channel, 3" x 3" Tubing	Finish (Prep)	Steel is Cleaned to Ensure a Professional Smooth Finish.
Bed Crossmembers	3" Channel		
Bed Long Sils	5" Channel	Finish	Superior Quality Finish is Applied for a Highly Decorative and Protective Finish.
Bed Side Rails	6-1/2" Formed Angle		
Fenders	Double Square Broke Diamond Plate		

Standard Features

- Lockable Pump & Battery Box Mounted in Front of Bed
- J-Hooks for Tie Down
- Fully Formed Shroud for Tarp
- Self Contained Electric/Hydraulic Scissor Lift
- 45 Degree Dump Angle
- Combo Gate
- 24", 12 Ga. Sides
- 10 Ga. Floor
- Stake Pockets (Sides)
- EZ Lube Hubs
- Dexter Brand Axles
- 110VCharger
- (4) 5/8" D-Rings Inside Bed
- Nev-R-Adjust Electric Brakes
- Cambered Axles
- Spare Tire Mount
- Diamond Plate Fenders
- Grommet Mount Sealed Lighting
- L.E.D. Lighting Package
- Protected Wiring
- Complete Break-A-Way System w/Charger
- Radial Tires
- 2" Square Tubing Top Rail

Description

Weights & Capacities			
Length	Empty Weight	Payload	Box Capacity
21GX-16	6,230#	14,770#	8.3 Cubic Yards

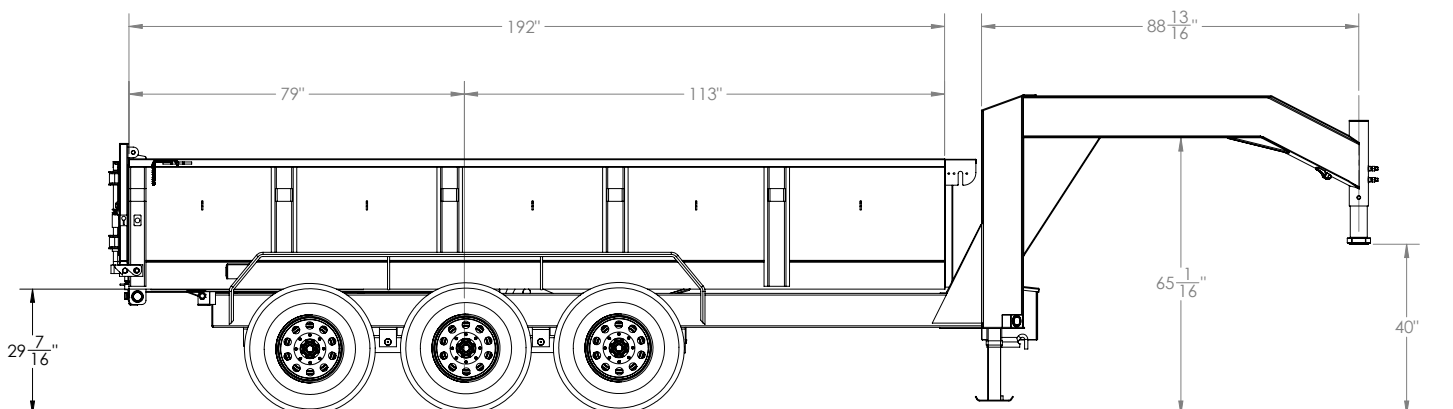

*Weights and cargo capacities shown are for base models without options and are estimates only

21GX Triple Axle Extra Wide Gooseneck Dump ●



Model	Weight*	Description
21GX-16	6,230#	83" x 16' Triple Axle Extra Wide Gooseneck Dump

*Weights shown are for base models without options and are estimates only

Optional Equipment

Category	Description
JACKS	Dual 2-Speed Landing Gear
TIRE/WHEEL	Spare Tire (ST235/80 R-16 LR-E)
TIRE/WHEEL	Tire Upgrade (ST235/85 R-16 LR-G)
TIRE/WHEEL	Spare Tire Upgrade (ST235/85 R-16 LR-G)
RAMPS	7' Slide In Ramps
POWER	Wireless Remote
POWER	5 Watt Solar Charger
BODY	Removable Deck on the Neck-Bolt On (8' W x 6' L)
BODY	24" Expanded Metal Side Extensions (16')
BODY	3' Solid Sheet Metal Sides (16')
BODY	4' Solid Sheet Metal Sides (16')
CARGO CONTROL	Crank Style Roll Tarp